


RESION Polyaspartic Floor Coating

RESION Polyaspartic is a high-gloss, aliphatic floor coating that stands out due to its very fast curing time: the floor is walk-on ready and recoatable after approximately 3 hours, allowing multiple layers in a single day. Because the coating is aliphatic, it is highly resistant to UV radiation and does not yellow. This also makes Polyaspartic ideal for outdoor applications such as balconies and terraces.

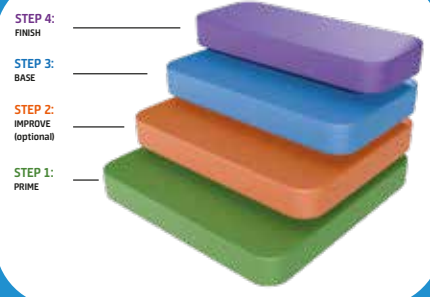

PROPERTIES

- Very fast curing (3 hours)
- High UV resistance
- Plasticizer-resistant
- Solvent-free
- Suitable for outdoor use

APPLICATIONS



Parking
garages



Balconies



Hospitality
industry

COLORS

Available in any RAL color,
custom-made for you.

NCS

RAL
COLOURS

Product	Description	Consumption
STAP 1: PRIME		



EP Floor Primer SF

Primer voor poreuze ondergronden

300 g/m²



EP Floor Primer WB

Primer voor niet-poreuze ondergronden

100-150g/m²

STAP 2: IMPROVE (optional)



EP Scratch Coat

Epoxy scratch coat

1-3 kg/m²



EP Leveling

Epoxy leveling mortar

1,5-4,5 kg/m²

STAP 3: BASE



PA Floor Coat

Epoxy coating floor

250-300 g/m²

STAP 4 FINISH



Floor Finish Matt

Polyurethane topcoat with matte finish

80 g/m²



TyreProof Finish

Plasticizer-resistant polyurethane
topcoat with matte finish

125-150 g/m²